



## Podnośnik nożycowy elektryczny 12m GENIE GS 3384 RT

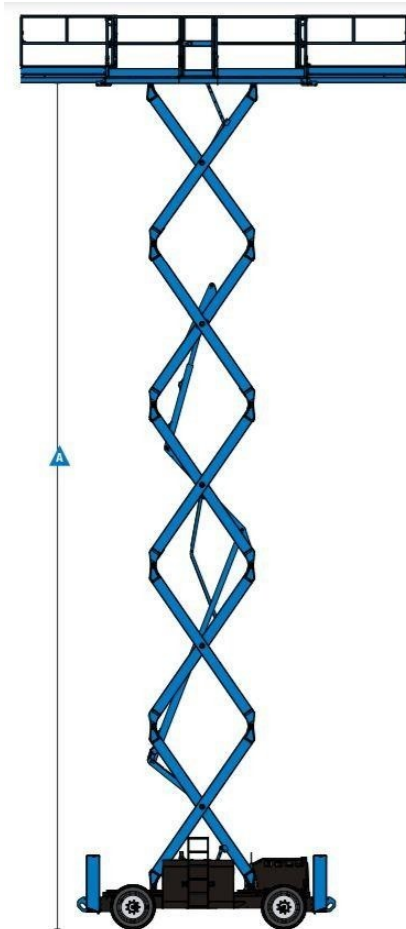

## Specifications

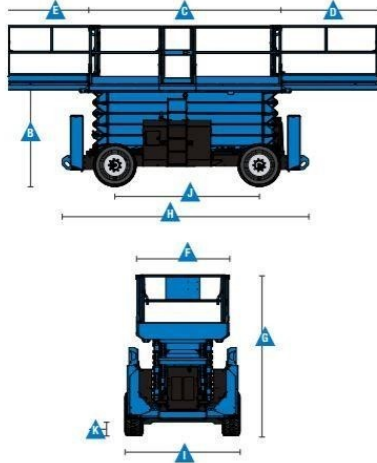

| Model  | GS-3384 RT |                |
|--|------------|----------------|
| Measurements                                       | Metric     | US             |
| Working height maximum*                            | 11.94 m    | 39 ft 2 in     |
| <b>A</b> Platform height maximum                   | 9.94 m     | 32 ft 6 in     |
| <b>B</b> Platform height - stowed**                | 1.55 m     | 5 ft 1 in      |
| <b>C</b> Platform length outside:                  | 3.98 m     | 13 ft .5 in    |
| extended - single deck                             | 5.34 m     | 17 ft 6.25 in  |
| extended - dual deck                               | 6.57 m     | 21 ft 6.5 in   |
| extended - super deck                              | 7.38 m     | 24 ft 2.5 in   |
| <b>D</b> Slide-out platform extension deck - front | 1.52 m     | 5 ft           |
| <b>E</b> Slide-out platform extension deck - rear  | 1.22 m     | 4 ft           |
| <b>F</b> Platform width - outside                  | 1.83 m     | 6 ft           |
| <b>G</b> Height - stowed: folding guardrails       | 2.68 m     | 8 ft 9.5 in    |
| rails lowered                                      | 2.0 m      | 6 ft 6.75 in   |
| <b>H</b> Length - stowed: single deck              | 3.94 m     | 12 ft 11.25 in |
| dual deck  | 3.98 m     | 13 ft 5 in     |
| super deck   | 4.81 m     | 15 ft 9.5 in   |
| with outriggers                                    | 4.88 m     | 16 ft          |
| Length - extended: single deck                     | 5.40 m     | 17 ft 9 in     |
| dual deck  | 6.57 m     | 21 ft 6.5 in   |
| super deck   | 7.38 m     | 24 ft 2.5 in   |
| <b>I</b> Width                                     | 2.13 m     | 7 ft           |
| <b>J</b> Wheelbase                                 | 2.84 m     | 9 ft 4 in      |
| <b>K</b> Ground clearance - center                 | 0.33 m     | 13 in          |

### Productivity

|                                   |                                     |              |
|-----------------------------------|-------------------------------------|--------------|
| Maximum platform occupancy        | 7                                   | 7            |
| Lift capacity                     | 1,134 kg                            | 2,500 lbs    |
| ift capacity - extension deck     | 227 kg                              | 500 lb       |
| Drive height                      | full height                         | full height  |
| Drive speed - stowed              | 6.4 km/h                            | 4.0 mph      |
| Drive speed - raised              | 1.1 km/h                            | 0.7 mph      |
| Gradeability - stowed***          | 50%                                 | 50%          |
| Maximum outrigger levelling****   | 7°(front to back)/12°(side to side) |              |
| Turning radius - inside           | 3.09 m                              | 10 ft 1.5 in |
| Turning radius - outside          | 5.94 m                              | 19 ft 6 in   |
| Raise/lower speed                 | 45/29 sec                           | 45/29 sec    |
| Controls                          | proportional                        | proportional |
| Drive                             | four wheel                          | four wheel   |
| Tyres - foam-filled rough terrain | 25 x 79 cm                          | 10 x 31 in   |

### Power

|                           |   |         |  |
|---------------------------|---|---------|--|
| Power source              | Deutz D2011L03i 3 cylinder diesel<br>36 kW (49 hp) air cooled |         |  |
| Auxiliary Power unit      | 12 V DC   | 12 V DC |  |
| Fuel tank capacity        | 113.6 L   | 30 gal  |  |
| Hydraulic system capacity | 113.6 L   | 30 gal  |  |

### Sound & Vibration Levels

|   |                       |                          |                       |                          |
|---|-----------------------|--------------------------|-----------------------|--------------------------|
| Sound pressure level (ground workstation)   | 88 dBA                | 88 dBA                   | 88 dBA                | 88 dBA                   |
| Sound pressure level (platform workstation) | 78 dBA                | 78 dBA                   | 78 dBA                | 78 dBA                   |
| Vibration                                   | <2.5 m/s <sup>2</sup> | 8 ft 2 in/s <sup>2</sup> | <2.5 m/s <sup>2</sup> | 8 ft 2 in/s <sup>2</sup> |

### Weight\*\*\*\*\*

|   |            |            |
|---|------------|------------|
| CE base machine   | 5,445 kg   | 12,002 lbs |
| The basic unit has the single extension deck, diesel motor, no outriggers, foam-filled or non-marking tyres, CE link guard and CE load sense. |            |            |
| Unit weight modifiers for options   |            |            |
| Outriggers*****   | add 760 kg | 1,675 lbs  |
| Dual Extension decks  | add 356 kg | 784 lbs    |
| Super decks   | add 411 kg | 906 lbs    |
| Generator   | add 48 kg  | 105 lbs    |

### Standards Compliance

EU Directives: 2006/42/EC - Machinery (harmonized standard EN280); 2004/108/EC (EMC); 2000/14/EC (Outdoor Noise)

## LNW POLSKA Sp. z o.o.

39-200 Dębica, ul. Cmentarna 33/2

Tel: 518 847 832 / 510 079 216

[lnwpolska@gmail.com](mailto:lnwpolska@gmail.com) / [bogdanlnwpolska@gmail.com](mailto:bogdanlnwpolska@gmail.com)

NIP: 8722432138 REGON: 389081830